

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

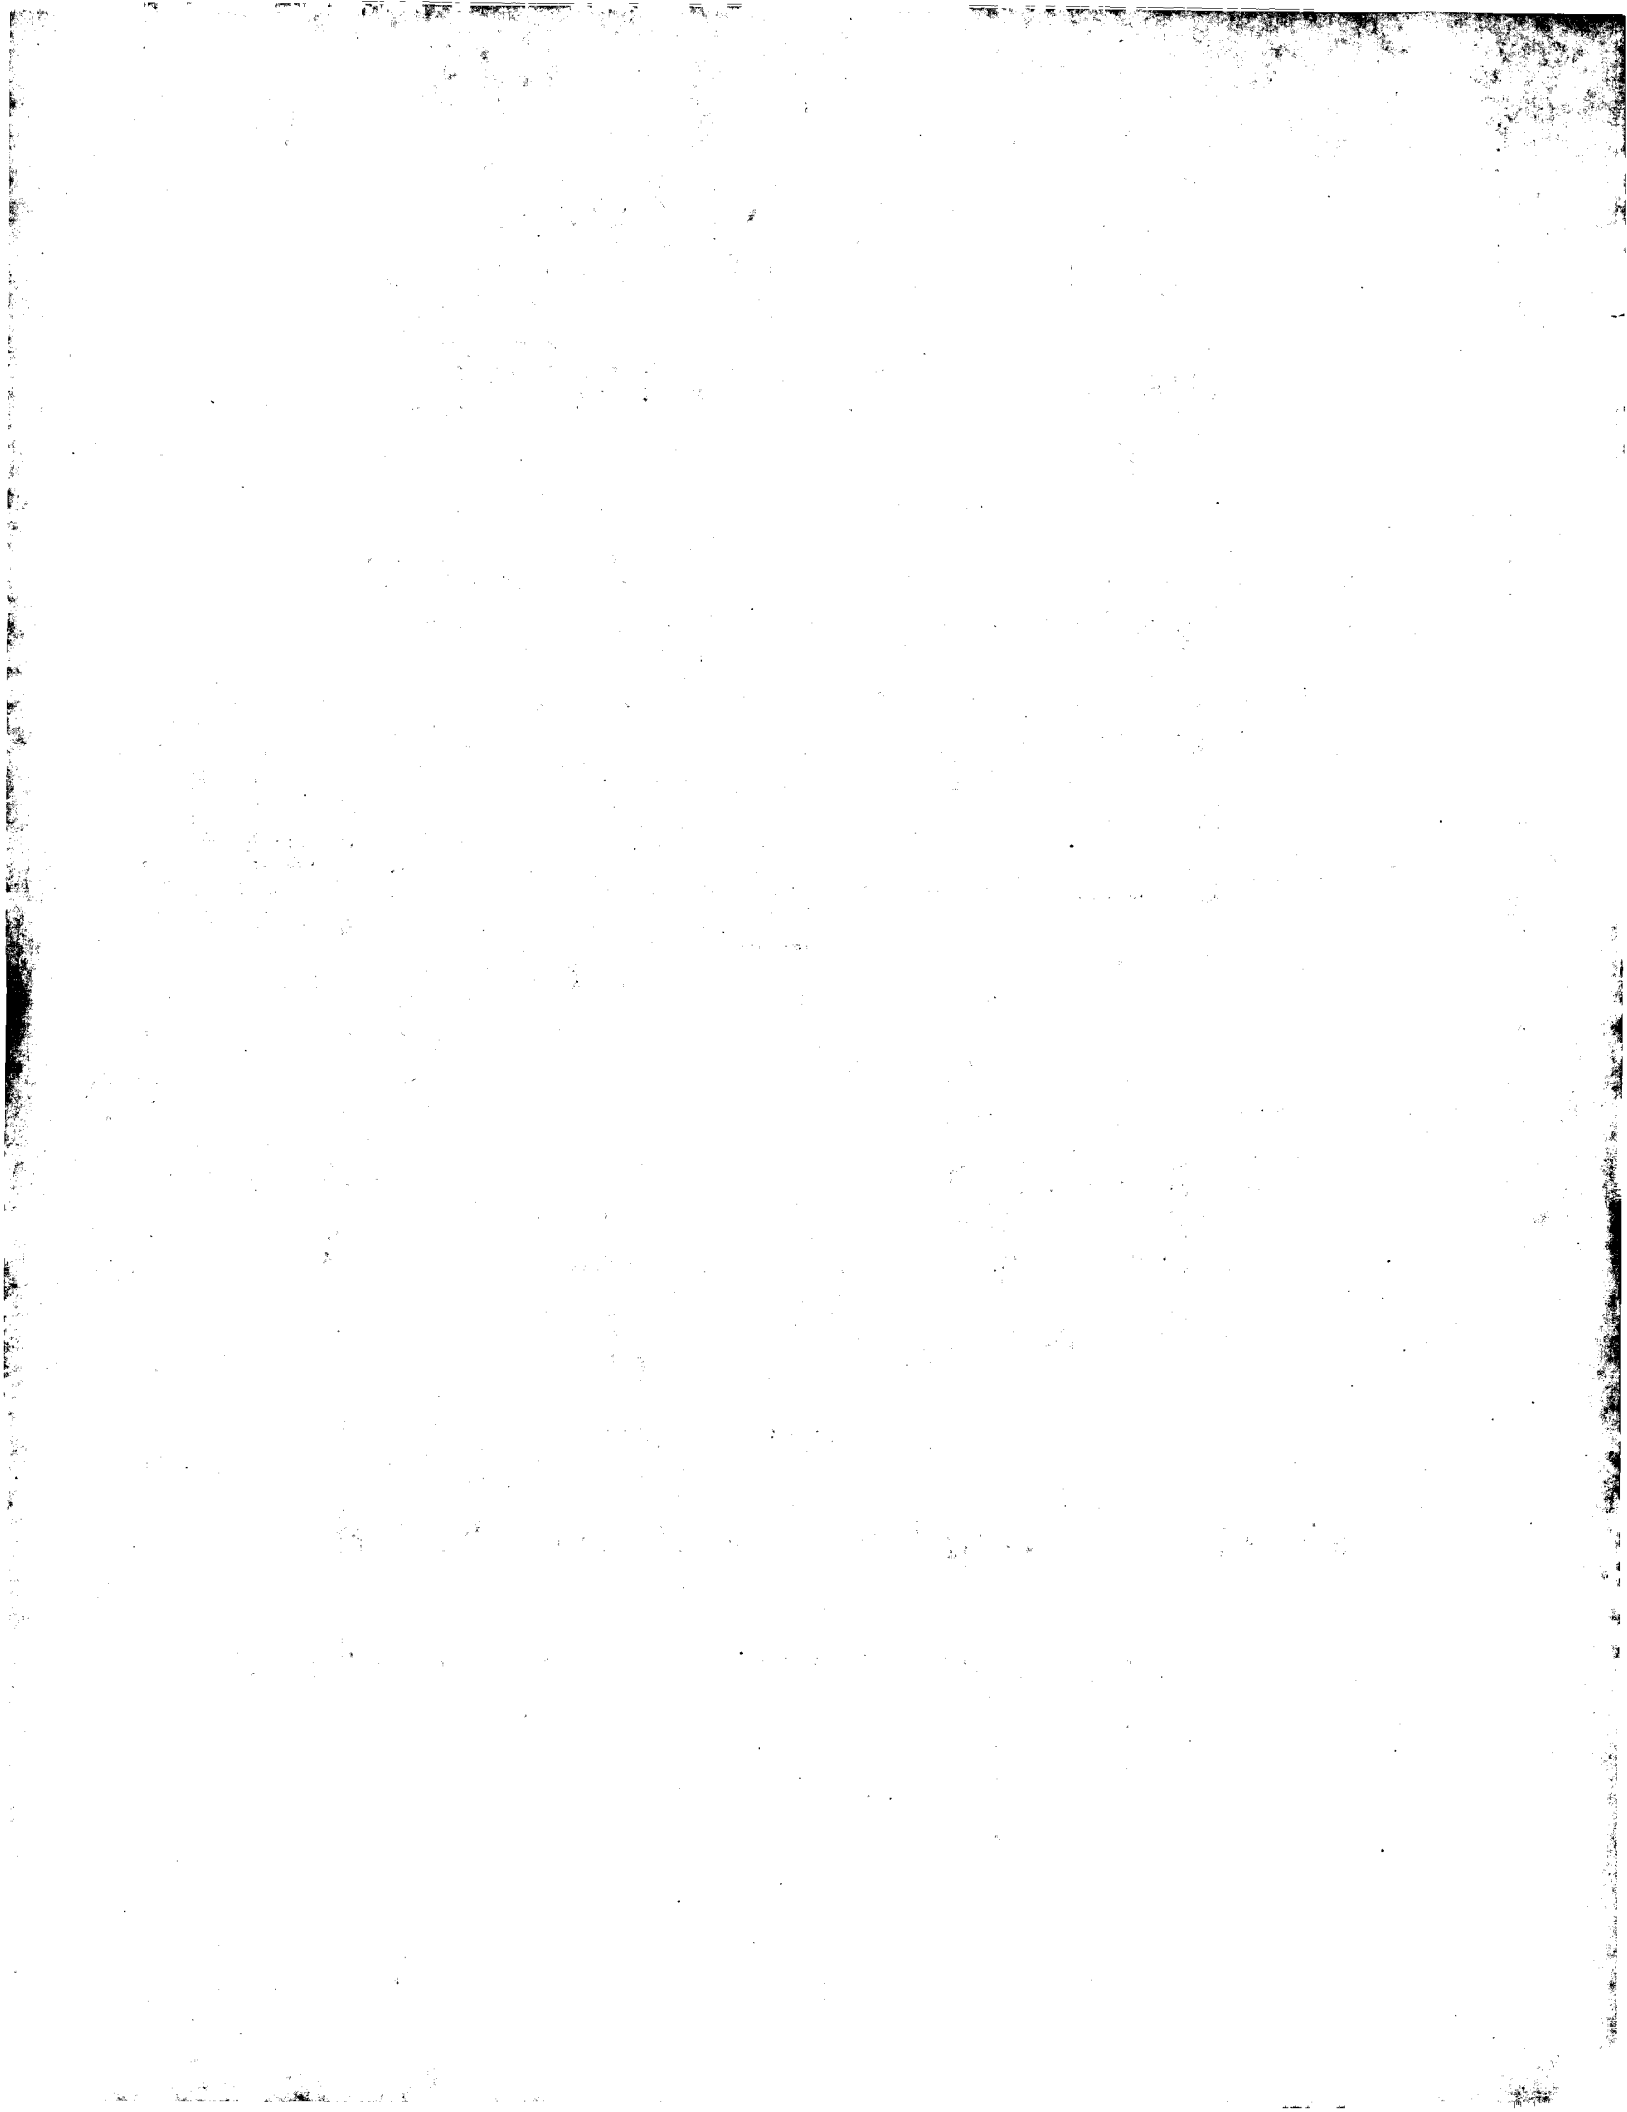



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of:  
Lauritzen, et al.  
  
Serial No.: 10/720,837  
  
Filed: November 21, 2003  
  
Confirmation No.: Unknown  
  
For: Fluid Removal from Gas  
Wells

§  
§  
§  
§  
§  
§  
§  
§  
§  
§  
§

Group Art Unit: Unknown

Examiner: Unknown

MAIL STOP PATENTS  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

CERTIFICATE OF MAILING 37 CFR 1.8	
I hereby certify that this correspondence is being deposited on January 22, 2004 with the United States Postal Service as First Class Mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450 Alexandria, VA 22313-1450.	
<u>22 Jan 2004</u> Date	<u>William B. Patterson</u> Signature

**CLAIM TO PRIORITY**

Applicant(s) reaffirm the claim for the benefit of filing date of the following foreign patent application referred to in Applicant's Declaration:

Great Britain Application Serial Number 0227394.4 filed November 23, 2002.

A copy of the application certified by the Great Britain Patent Office is enclosed.

Respectfully submitted,

William B. Patterson  
Registration No. 34,102  
MOSER, PATTERSON & SHERIDAN, L.L.P.  
3040 Post Oak Blvd. Suite 1500  
Houston, TX 77056  
Telephone: (713) 623-4844  
Facsimile: (713) 623-4846  
Agent for Applicant(s)





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

Dated 18 December 2003



Patent Act 1977  
(Rule 10)

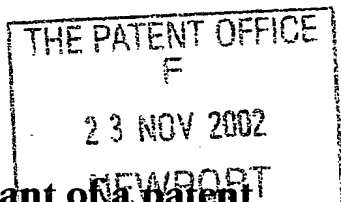

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

AS\AM\P12575GB

2. Patent application number

(The Patent Office will fill in this part)

0227394.4

25NOV02 E765885-1 000239  
P01/7700 0.00-0227394.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

08028714001

Patents ADP number (if you know it)

WEATHERFORD/LAMB, INC.  
515 POST OAK BOULEVARD  
SUITE 600  
HOUSTON  
TX 77027  
UNITED STATES OF AMERICA

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE, UNITED STATES OF AMERICA

4. Title of the invention

FLUID REMOVAL FROM GAS WELLS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

CRUIKSHANK & FAIRWEATHER  
19 ROYAL EXCHANGE SQUARE  
GLASGOW  
G1 3AE  
SCOTLAND  
UNITED KINGDOM

Patents ADP number (if you know it)

547002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description	17
Claim(s)	9
Abstract	
Drawing(s)	5 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents


Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

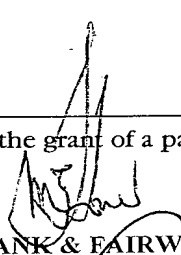11. I/We request the grant of a patent on the basis of this application.
- |                          |  |                  |
|--------------------------|--|------------------|
| Signature                |  | Date             |
| CRUIKSHANK & FAIRWEATHER |  | 22 NOVEMBER 2002 |
12. Name and daytime telephone number of person to contact in the United Kingdom
- |               |
|---------------|
| ANDREW SHANKS |
| 0141 221 5767 |

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# FLUID REMOVAL FROM GAS WELLS

## FIELD OF THE INVENTION

This invention relates to removal of produced fluids from well bores, and in particular to the removal of multiple phases of fluids from well bores. Embodiments of the invention relates to the removal of natural gas and water from a natural gas-producing well.

## BACKGROUND OF THE INVENTION

In the oil and gas production industry, and more specifically in the production of natural gas, water encroachment into the well bore which extends from the gas-producing formation to surface presents significant difficulties in maintaining production output. Where the produced fluid contains only a small proportion of water, the water will typically remain in droplet form and the velocity of the produced gas flowing from the formation into the well bore and up to surface will often be sufficient to entrain the water droplets and carry the droplets to surface.

However, as the proportion of water in the produced fluid increases, the density of the gas\water droplet column in the well bore rises. The resulting increase in hydrostatic pressure reduces the pressure gradient between

the gas-producing formation and the section of well bore which intersects the formation, which may eventually kill the well.

Furthermore, the point may also be reached where the  
5 level of water production increases, or the gas velocity decreases, to a point where the velocity of the gas is not sufficient to carry the water droplets out of the well.

One temporary solution to such problems is to install velocity strings in the well bore to restrict the flow area  
10 and thus increase the velocity of the produced gas as it travels up the well. However, such velocity strings create significant flow restrictions in the well bore, thus reducing production rates. Also, the point will be reached where the velocity of the gas within the restricted area  
15 strings drops below the rate necessary to carry the water droplets to surface, and the well is again killed.

All of these problems are particularly acute in depleted wells; that is, wells which have been producing for some time, and in which the formation pressure has  
20 diminished to a level of economic or physical unfeasibility.

To overcome these difficulties it is known to employ artificial lift systems, which may be in the form of compressors or pumps which are located in the well.

## SUMMARY OF THE INVENTION

According to the present invention there is provided a method of removing produced fluid from a well producing both gas and liquid, the method comprising:

5        utilising produced gas flowing from a formation to drive a produced liquid pump; and

      carrying produced gas and produced liquid towards surface in separate fluid streams.

      According to another aspect of the present invention  
10       there is provided apparatus for location in a well bore for use in removing produced fluid from a well producing both gas and liquid, the apparatus comprising:

      a produced liquid pump for location in a well bore and adapted to be driven by produced gas flowing from a  
15       producing formation to surface; and

      a conduit for carrying produced liquid from the pump towards surface.

      In these aspects of the invention, the use of produced gas to drive the produced liquid pump obviates the need to  
20       run a power transmission conduit from surface. Thus, there is minimal restriction in the available flow area of the bore, and a corresponding minimal reduction in the production capability of the well bore. Furthermore, in preferred embodiments of the invention there is no  
25       obstruction of the safety valve; this avoids the need to modify the well to allow installation of the apparatus, and

in particular to change the location or configuration of the safety valve such that a power transmission cable or conduit may pass down through the well bore without having to pass through the safety valve. This feature also facilitates retrofitting of the apparatus in an existing well bore, as once the apparatus is run into the well bore there is no requirement for additional apparatus, such as a power supply, on surface. In other aspects of the invention, the safety valve may include provision for control lines, that is control lines may pass around rather than through the valve, and in such wells the produced liquid pump may be driven by means other than produced gas, for example the pump may be electrically powered, or powered by re-injected water. In still further embodiments, it may be acceptable for a control line to pass through the safety valve, or it may not be necessary to pump the produced liquid towards surface, for example the liquid may be pumped into another formation, rather than carried to surface.

Preferably, the separate fluid streams are co-mingled in the well bore. Carrying the gas and liquid streams separately towards surface, and then co-mingling the streams closer to surface, reduces the height of the column of liquid-carrying gas in the well bore, allowing the well to produce at a higher rate. Furthermore, as the point where the fluid streams are co-mingled is closer to

surface, the gas pressure at this point will be lower and its velocity higher, such that the gas velocity should be more than sufficient to carry the liquid to surface. Also, in a preferred arrangement, the gas and liquid are co-mingled below the safety valve, increasing well safety and facilitating other operations, which require temporary isolation of the well bore from surface.

In certain embodiments of the invention the stream of produced liquid may include a gas component, to reduce the density of the liquid stream. The gas may be produced gas, or may be a gas, such as nitrogen, injected from surface.

Typically, the produced gas will be natural gas, and the produced liquid will be water. Alternatively, the liquid may be oil, or a mixture of oil and water.

The produced liquid may be liquid which has gathered in a lower portion or sump of the well bore, and a stinger may extend from the pump into this lower portion. Alternatively, or in addition, the invention may further comprise separating the produced liquid from produced gas, and then pumping the separated produced liquid to surface. The separation may be achieved by any appropriate means, such as a cyclone separator, or an arrangement which reduces the temperature of the produced gas, causing the liquid to condense. A cyclone separator is preferred as the separator also tends to separate solids from the fluid, with a resulting decrease in wear of downstream components.

From the separator, the liquid may flow downwards to a sump, from which the liquid is drawn by the pump, perhaps via a stinger.

The produced liquid pump may take any appropriate form. However, the pump must of course be compact, robust and reliable. A preferred pump is a reciprocal piston pump, in which the piston reciprocates axially relative to the bore axis. The pump may operate in combination with appropriate valving, most preferably appropriate one-way valves.

The produced liquid pump is preferably turbine-driven. The output from a turbine in these situations is likely to be high speed, low torque and thus it is preferred that the turbine is coupled to the pump via an appropriate gearbox, most preferably by a harmonic drive gearbox, which will convert the high speed, low torque input to a relatively low speed, high torque output (reduction ratios of around 100:1 are typical). The harmonic drive gearbox, which is compact, is preferably co-axial with the turbine. The pump may be a single or multi-stage axial flow pump, but as noted above it is most preferably a reciprocating pump, and thus the apparatus may comprise a mechanism for converting rotary motion to reciprocal motion. Any appropriate means may be employed, however it is preferred to utilise a series of selectively rotatable and axially movable cams such as described in GB 2219958A, WO93\11910, WO02\14028,

and WO02\46564, the disclosures of which are incorporated herein by reference. The cams may be arranged and configured to provide a selected degree of axial movement, depending on the optimum throw required to operate the pump. Furthermore, the cam profiles may be selected to provide a desired pattern of movement. One or more pumps may be provided, and the pumps may be provided in series or in parallel. Pumps may be provided in series to allow access to deeper wells, in which the hydrostatic pressure experienced at the lower end of the well will be correspondingly higher. For such applications, two or more pumps, or two or more apparatus, may be provided at spaced intervals in the well bore. Thus, the liquid may be pumped from the lowermost or first pump to the second pump, and then from the second pump to the third pump, and so on. Providing two or more pumps in parallel, or two or more apparatus in parallel, improves reliability and may provide for redundancy. The outputs of the two or more pumps may be manifolded together.

The conduit for carrying the produced liquid may take any appropriate form, but will typically be of a relatively small diameter conduit of jointed or continuous form. Preferably, the conduit is in the form of a "macaroni" string, having a diameter of approximately 1¼ inches.

Where there is co-mingling of the gas and liquid this will preferably take place below a subsurface safety valve

(SSSV). Thus, the apparatus may be installed in a well bore without obstructing or otherwise interfering with the operation of the SSSV. Co-mingling may be achieved by providing a throttle or other restriction in the bore adjacent to the outlet of the produced liquid conduit. The restriction accelerates the gas flow and also reduces the gas pressure, thus tending to draw the liquid from the conduit, and the relatively low pressure assisting in dispersing the liquid in droplet form through the flowing gas.

Aspects of the invention may also be utilised where it is desired to bullhead or restart a well that has already been killed by water ingress. This may be achieved by pumping gas into the well to force the water which has gathered in the well bore back into the formation. The well is then allowed to produce back, initiating the method as described above.

Further aspects of the invention relate to a downhole pump in which a rotary drive is utilised to actuate a reciprocating pump. The rotary drive may be a turbine, or any other appropriate drive means, such as an electric motor. The pump may take any appropriate form, but is preferably a reciprocating piston pump. The pump may include appropriate gearing, most preferably in the form of a harmonic drive. The conversion of rotary drive to reciprocating motion may be achieved by any appropriate

mechanism, but most preferably utilises a series of selectively rotatable and axially translatable cams and cam followers. The number and configuration of the cams may be selected to provide a desired degree of movement, with the capability to multiply up the movement produced. The pump may be positively driven in both directions, or may utilise a spring or pressure return.

#### BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic sectional view of apparatus for use in removing fluid from a well producing both natural gas and water, in accordance with a preferred embodiment of the present invention;

Figure 2 is an enlarged view of area 2 of Figure 1;

Figure 3 is a sectional view on line 3 - 3 of Figure 2;

Figure 4 is an enlarged sectional view of part of the apparatus of Figure 1;

Figure 5 is an enlarged exploded view showing components of a pump assembly of the apparatus of Figure 1;

Figure 6 is a view of a number of the components shown in Figure 5; and

Figure 7 is a schematic sectional view of apparatus

for use in removing fluid from a well producing both natural gas and water, in accordance with a further embodiment of the present invention.

## 5 DETAILED DESCRIPTION OF DRAWINGS

Reference is first made to Figures 1, 2 and 3 of the drawings, which illustrates apparatus 10 located in a well bore, for removing gas and water from the well. The Figure illustrates various well components including a section of completion or production tubing 14 which extends into a section of perforated liner 16. The liner 16 intersects a natural gas and water-producing formation (not shown). A self-closing sub-surface safety valve (SCSSSV) 18 is located at the upper end of the completion tubing 14 and the tubing 14 is located and sealed relative to the liner 16 by an appropriate packer 20.

In use, the apparatus 10 is used to facilitate the production of natural gas and water from the well. To this end the apparatus 10 includes a pump assembly 22 which is driven, via a reduction gearbox 24, by a produced gas-driven turbine 26. The turbine 26, gearbox 24 and pump assembly 22 are coupled together to form an elongate cylindrical unit 28 which is located relative to the lower end of the production tubing 14 by a suitable nipple 30 and tubing shoe 32.

A macaroni string 34 extends upwards from the unit 28,

through the production tubing 14, carrying produced water from the pump 22. The produced gas, after passing through the turbine 26, passes up through the production tubing 14 separately of the gas stream. A co-mingling and hang-off sub 36 is provided at the top of the macaroni string 34 for locating the upper end of the string 34 in the tubing 14 and such that the water leaving the upper end of the string 34 co-mingles with the gas stream in the tubing 14. The gas, with the water entrained in droplet form, then passes upwardly through the SCSSSV 18, and on to surface, where the gas and water may be separated.

Details of the apparatus 10 will now be described with reference to the remaining figures, starting with Figure 4, which illustrates the unit 28 with the macaroni string 34 extending from the upper end thereof, and with a stinger 38 extending from the lower end of the unit 28. In use, the open lower end of the stringer 38, which includes a filter pack to filter out solids, is located within a volume of water 40 lying in the sump of the well (see Figure 1).

The unit 28 is located in the tubing shoe 32 such that produced gas flowing from the liner 16 into the production tubing 14 has to pass through the turbine 26, where the gas impinges on the turbine blades 42. The passage of the gas through the turbine 26 tends to dry the gas, as the expansion and cooling experienced by the gas as it passes through the turbine 26 tends to cause water carried by the

gas to condense out; this condensate will coalesce and then fall to the sump.

The turbine rotor 44 is mounted on a hollow drive shaft 46 mounted centrally and coaxially of the unit, the shaft 46 extending downwardly into the gearbox 24, which is in the form of a harmonic drive. Accordingly, the harmonic drive is co-axial with the turbine 26 and changes the output of the turbine 26 from a high speed low torque output, to a low speed high torque output. The hollow gearbox output drive shaft 48 extends into the pump assembly 22, components of which are illustrated in exploded format in Figures 5 and 6 of the drawings.

The pump assembly 22 includes an arrangement for converting the rotary drive output of the gearbox 24 into reciprocal motion, to drive a reciprocating piston 50. The gearbox output shaft 48 is mounted in a bearing 52 and passes through a static annular cam 54 which is locked axially and rotatably relative to the housing 56 of the unit 28. Located below the static cam 54 is a drive cam 58, which is axially movable on the drive shaft 48. However, the drive cam 58 is rotatably locked relative to the drive shaft 48 by virtue of the co-operating hexagonal forms 60, 62 of the drive shaft 48 and drive cam 58. Positioned below the drive cam 58 is an output cam 64 which is axially movable within the housing 56 but is prevented from rotating by its interaction with the piston 50, via

co-operating castellations 66, 68.

5 The piston 50 is itself axially movable in the housing 56 but is locked against rotation by the interaction of a radially extending piston location pin 70 with a corresponding axial slot 72 in the housing 56. The piston 50 defines a through bore and the lower end of the piston carries a labyrinth seal 74.

10 Rotation of the drive shaft 48 causes the drive cam 54 to rotate. The sine wave-like forms of the abutting faces of the static cam 54 and the drive cam 58 cause the rotating drive cam 58 to move axially relative to the static cam 54 and the housing 56 between a position in which the troughs and peaks of the cam surfaces coincide, and a position in which the peaks of the surfaces coincide.

15 Similarly, the sine wave form of the abutting faces of the drive cam 58 and the output cam 64 cause the non-rotating output cam 64 to be moved axially as the drive cam 58 is rotated. The cam faces are oriented and arranged such that the initial axial movement of the drive cam 58 induced by

20 the rotation of the drive cam 58 relative to the static cam 54 is amplified by the relative rotational movement between the drive cam 58 and the output cam 64, this amplified axial movement being transferred to the piston 50.

25 The piston 50 is urged towards an upper or induction position by a light compression spring 78, such that as the drive shaft 48 is rotated the piston 50 moves, from the

position shown in Figure 4, downwardly against the spring 78. The piston 50 acts on a volume of water below the piston, in the spring chamber 79, the water being prevented from passing downwardly out of the chamber 79 through the stinger 38 by a one-way valve 80, but being permitted to pass from the upper end of the unit 28 via a second one-way valve 82, which opens when the water pressure within the pump rises to a level above hydrostatic pressure (typically around 3000psi). Movement of the piston 50 in the opposite direction, that is upwards within the housing 56, reduces the pressure across the upper valve 82, such that the valve 82 closes, and allows the lower valve 80 to open, such that the water may be drawn into the spring chamber 79 through the stinger 38. It will be noted that the cam faces are arranged such that each rotation of the gearbox output shaft 48 will result in two full strokes of the piston 50. Thus, the passage of production gas from the producing formation, up through the well bore, drives the turbine 26 which in turn drives the pump unit 22, which causes water to be drawn up from the sump and pumped towards surface through the macaroni string 34. Thus, the produced gas and the produced liquid move towards the surface in separate streams, until reaching the co-mingling and hang-off sub 36. The restriction in the flow area of the gas caused by the sub 36 accelerates the gas stream, and also reduces the pressure of the gas stream. This assists in drawing the

water from the upper end of the string 34, such that the water, in droplet form, is carried upwardly from the end of the string 34 through the upper end of the tubing 14, and through the SCSSSV 18, by the produced gas stream.

5       The apparatus 10 has a relatively small diameter and thus may be accommodated in smaller diameter well bores, and indeed may be readily retrofitted into an existing well, and subsequently removed if necessary. The volume of water raised to surface by the apparatus is likely to be  
10       relatively small (typically below 24 barrels per day), however this can still have a significant impact on a well and can extend the life of a well, or increase production in a well, at relatively low cost.

Reference is now made to Figure 7 of the drawings,  
15       which illustrates an alternative apparatus 100 in accordance with a further embodiment of the present invention. The apparatus 100 is similar to the apparatus 10 described above, but has the unit 102 containing the turbine 104, gearbox 106, and pump unit 108 located wholly  
20       within the liner 110, and the lower end of the macaroni string 112 located relative to the liner 110 by appropriate slips 114. Accordingly, in order to direct the produced natural gas through the turbine 104, a restriction 116 is positioned around the turbine 104.

25       The apparatus 100 also further includes a gas/water cyclone separator 118. A porous pack-off bushing 120

positioned around the lower end of the separator 118 directs the "wet" gas from the producing formation into the lower end of the separator 118. The gas is directed upwards through the separator 118 in a helical path, such that heavier material, in particular any solids and water droplets, are thrown outwardly to coalesce and pass through the perforated lower section of the separator housing 122. The water may then flow downwards to the sump, through the porous bushing 120.

The dry gas passes out of the upper end of the separator 118 and is directed through the turbine 104. The output of the turbine drives the pump unit 108, via the gearbox 106, such that water is drawn out of the sump via the stinger 126, and pumped upwards through the string 112. At the co-mingling sub 128 the separate water and gas streams are combined, and pass up through the SCSSSV 130 to surface.

It will be apparent to those of skill in the art that the above-identified embodiments of the invention are merely exemplary, and that various modifications and improvements may be made thereto, without departing from the scope of the present invention. For example, in the embodiments described above only one apparatus 10, 100 is provided in the well. In other embodiments, particularly for use in deeper well, two or more apparatus may be provided in a well. The apparatus may be provided in

series, that is the produced gas is utilised to drive a first produced liquid pump at the lower end of the well bore, and from which the liquid is pumped part-way up the well bore to a second apparatus. At the second apparatus, 5 the produced gas is again employed to drive a turbine which in turn drives a pump to take the liquid further up the well bore. In other embodiments, two or more apparatus may be connected in parallel, that is the produced liquid outputs of the two or more pumps will be manifolded 10 together. Two or more groups of such apparatus may be provided in series, as described above. Providing apparatus in parallel may improve reliability particularly if some redundancy is built in to the system. Thus, if one apparatus should fail, the remaining apparatus will 15 continue to operate and maintain production.

## CLAIMS

1. A method of removing produced fluid from a well producing both gas and liquid, the method comprising:

utilising produced gas flowing from a formation to  
5 drive a produced liquid pump; and

carrying the produced liquid from the pump and the produced gas towards surface in separate fluid streams.

2. The method of claim 1, further comprising co-mingling the separate fluid streams.

10

3. The method of claim 2, wherein the fluid streams are co-mingled below a sub-surface safety valve.

15

4. The method of claim 2 or 3, further comprising restricting the gas stream before co-mingling the separate gas and liquid streams.

5. The method of any of the preceding claims, comprising running the pump and a conduit into an existing well bore.

6. The method of any of the preceding claims, wherein the produced gas comprises natural gas.

7. The method of any of the preceding claims, wherein the produced liquid comprises water.

8. The method of any of the preceding claims, wherein the produced liquid comprises oil.

5 9. The method of any of the preceding claims, wherein produced liquid is drawn from a lower portion of the well bore.

10 10. The method of any of the preceding claims, further comprising separating the produced liquid from produced gas, and then pumping the separated produced liquid towards surface.

11. The method of claim 10, wherein the separated produced liquid flows downwards to a sump, from which the liquid is drawn by the pump.

15 12. The method of any of the preceding claims, further comprising utilising the produced gas to drive at least two produced liquid pumps.

13. The method of claim 12, wherein the at least two produced liquid pumps are connected in parallel.

14. The method of claim 12, wherein the at least two produced liquid pumps are connected in series.

15. The method of any of the preceding claims, further comprising:

5        pumping gas into the well to force liquid lying in the well back into the formation; then  
         allowing gas to flow from the formation to drive the pump.

16. The method of any of the preceding claims, further  
10       comprising retrieving the pump and a conduit from the well bore.

17. A method of bullheading a gas-producing well containing liquid, the method comprising:

15       pumping gas into a well to force liquid lying in the well back into a formation; then  
         allowing gas to flow from the formation to drive a liquid pump; and  
         carrying gas and liquid from the pump towards surface in separate fluid streams.

20       18. The method of claim 17, further comprising co-mingling the separate fluid streams.

19. Apparatus for location in a well bore for use in removing produced fluid from a well producing both gas and liquid, the apparatus comprising:

5 a produced liquid pump for location in a well bore and adapted to be driven by produced gas flowing from a producing formation; and

a conduit for carrying produced liquid from the pump towards surface.

20. The apparatus of claim 19, further comprising means  
10 for co-mingling produced liquid from the conduit with gas in the well bore.

21. The apparatus of claim 19, wherein the means for co-mingling produced liquid from the conduit with gas in the well bore comprises a restriction in the bore adjacent an  
15 upper end of the produced liquid conduit.

22. The apparatus of claims 19, 20 or 21, further comprising a stinger for extending into a lower portion of the well.

23. The apparatus of any of claims 19 to 22, further  
20 comprising a separator for separating produced liquid from produced gas.

24. The apparatus of claim 23, wherein the separator is a cyclone separator.

25. The apparatus of any of claims 19 to 24, wherein the produced liquid pump is a reciprocal piston pump.

5 26. The apparatus of claim 25, further comprising at least two one-way valves, allowing liquid to be drawn into and then pumped from the pump.

27. The apparatus of any of claims 19 to 26, further comprising a turbine for driving the produced liquid pump.

10 28. The apparatus of any of claims 19 to 27, wherein the pump is provided in combination with a gearbox.

29. The apparatus of claim 28, wherein the gearbox is a harmonic drive gearbox.

15 30. The apparatus of claim 28 or 29, when dependent on claim 27, wherein the gearbox is co-axial with the turbine.

31. The apparatus of any of claims 19 to 30, wherein the pump is a reciprocating pump, and the apparatus further comprises a mechanism for converting a rotary drive to reciprocal motion.

32. The apparatus of claim 31, wherein the mechanism for converting rotary drive to reciprocal motion comprises a series of selectively rotatable and axially movable cams mounted about a mandrel.

5 33. The apparatus of any one of claims 19 to 32, wherein the conduit for carrying the produced liquid is a macaroni string.

34. The apparatus of any of claims 19 to 33, further comprising at least one further produced liquid pump, for  
10 location in the well bore and adapted to be driven by produced gas.

35. The apparatus of claim 34, wherein the produced liquid pumps are connected in parallel.

36. The apparatus of claim 34, wherein the produced liquid  
15 pumps are connected in series.

37. A method of removing fluid from a well, the method comprising:

locating a pump in a well containing both gas and liquid;

20 driving the pump to pump liquid towards surface;

carrying gas and the liquid towards surface in  
separate fluid streams; and then

co-mingling the separate fluid streams.

38. Apparatus for location in a well bore for use in  
5 removing fluid from a well containing both gas and liquid,  
the apparatus comprising:

a pump for location in a well bore;

a conduit for carrying liquid from the pump towards  
surface; and

10 means for co-mingling liquid from the conduit with gas  
in the well bore.

39. A method of removing fluid from a well, the method  
comprising:

carrying gas and liquid from a well towards surface in  
15 separate fluid streams; and then

co-mingling the separate fluid streams.

40. Apparatus for location in a well bore for use in  
removing fluid from a well containing both gas and liquid,  
the apparatus comprising:

20 a conduit for carrying liquid towards surface through  
a well bore separately of a gas stream; and

means for co-mingling liquid from the conduit with gas  
in the well bore.

41. Downhole pump apparatus comprising:

a rotary drive;

a reciprocating pump; and

5 means for converting the rotary output of the drive to  
a reciprocating motion.

42. The apparatus of claim 41, wherein the rotary drive is  
a turbine.

43. The apparatus of claim 41 or 42, wherein the pump is  
a reciprocating piston pump.

10 44. The apparatus of any of claims 41 to 43, further  
including gearing between the drive and the pump.

45. The apparatus of claim 44, wherein the gearing  
comprises a harmonic drive.

15 46. The apparatus of any of claim 41 to 45, wherein said  
means for converting the rotary output of the drive to a  
reciprocating motion comprises a series of selectively  
rotatable and axially translatable cams and cam followers.

47. The apparatus of any of claims 41 to 46, wherein the  
pump is positively driven in both directions.


48. The apparatus of any of claims 41 to 46, wherein the pump is driven in one direction.

49. A downhole pump assembly comprising at least two of the downhole pump apparatus of any of claims 41 to 48.

5 50. The assembly of claim 49, wherein the pumps of the downhole apparatus are connected in series.

51. The assembly of claim 49, wherein the pumps of the downhole apparatus are connected in parallel.

SKETCH No. ALSP-S-2000  
ARTIFICIAL LIFT SYSTEM - FULL LAYOUT

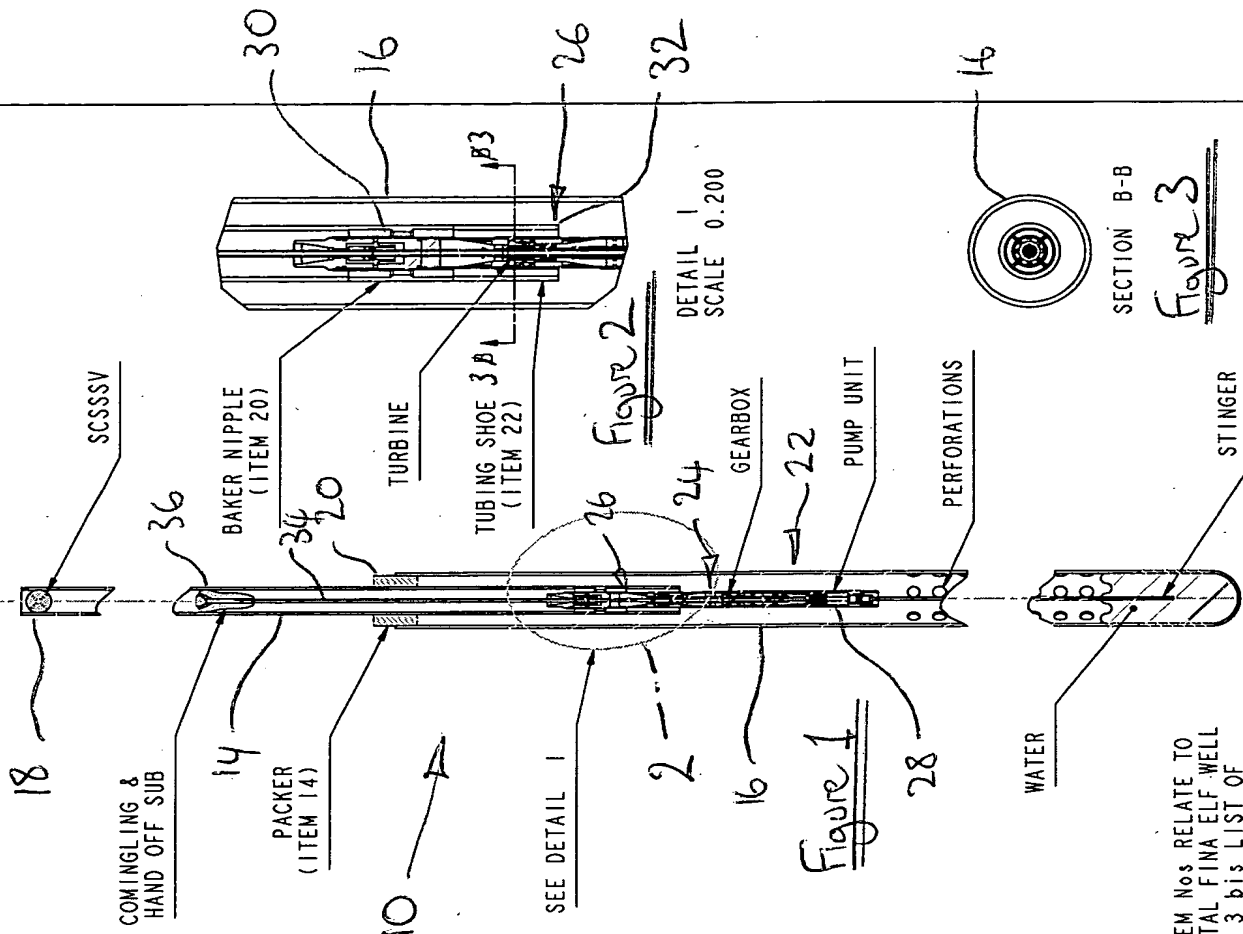

ITEM NOS RELATE TO  
TOTAL FINAL WELL  
LW 3 bis LIST OF  
COMPONENTS.




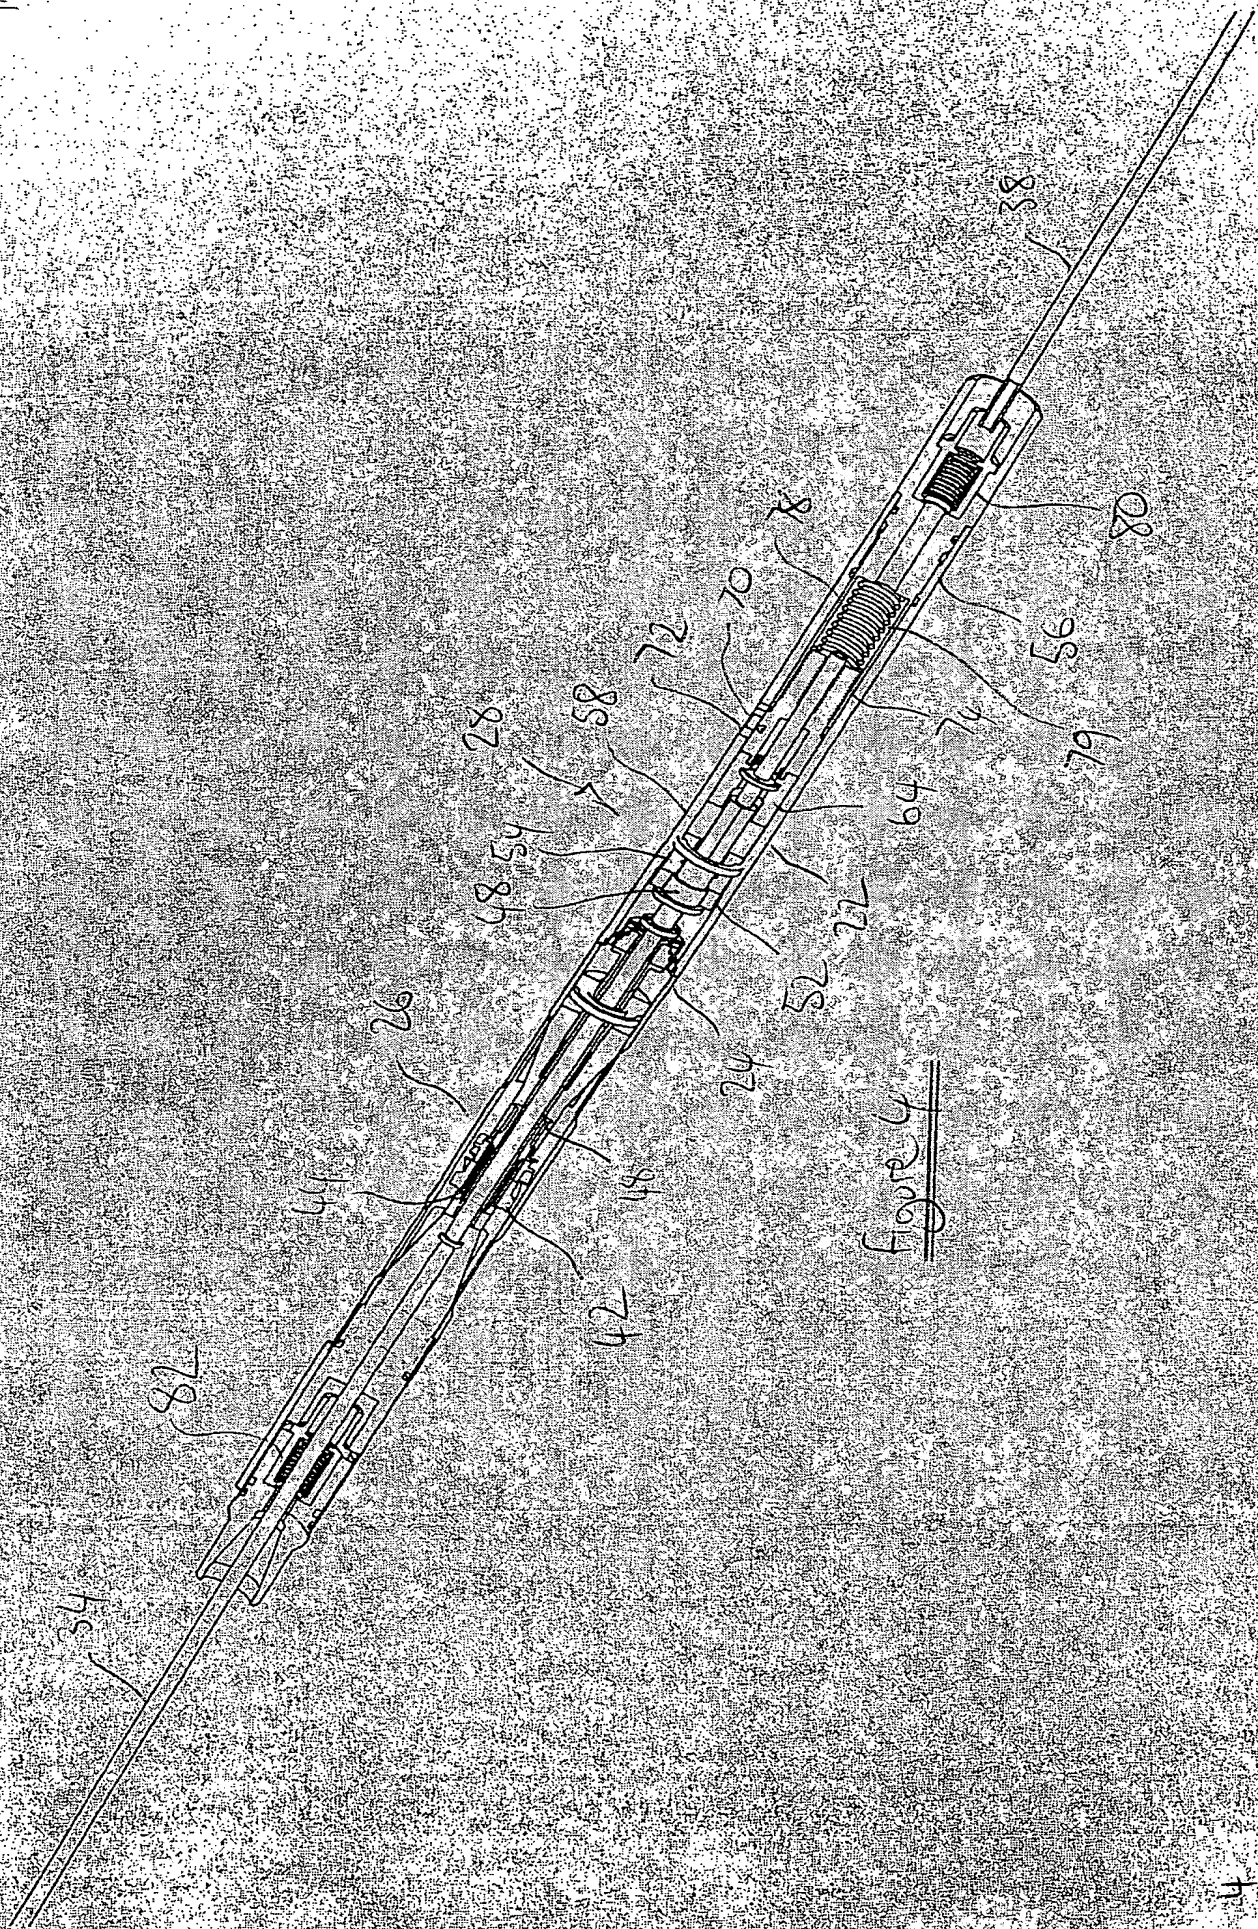


Figure 4

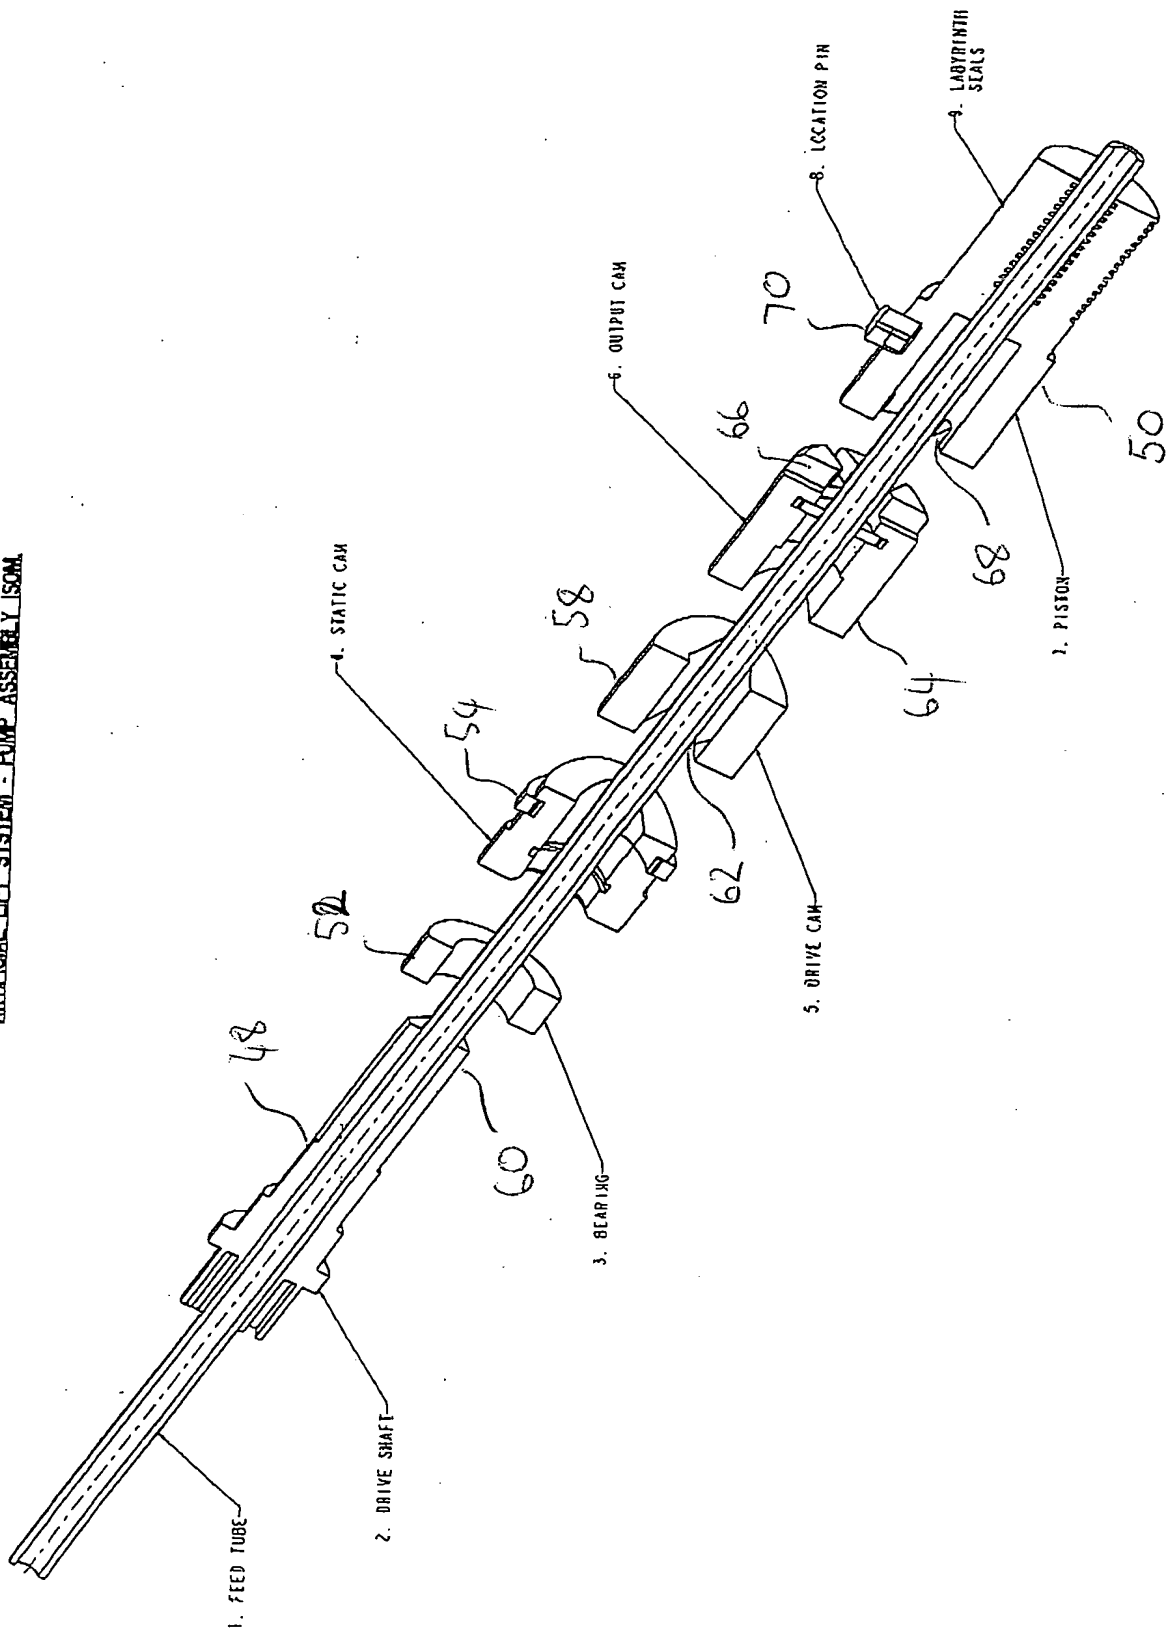

SKETCH No. ALSP-S-2003  
ARTIFICIAL LIFT SYSTEM - PUMP ASSEMBLY ISOM.





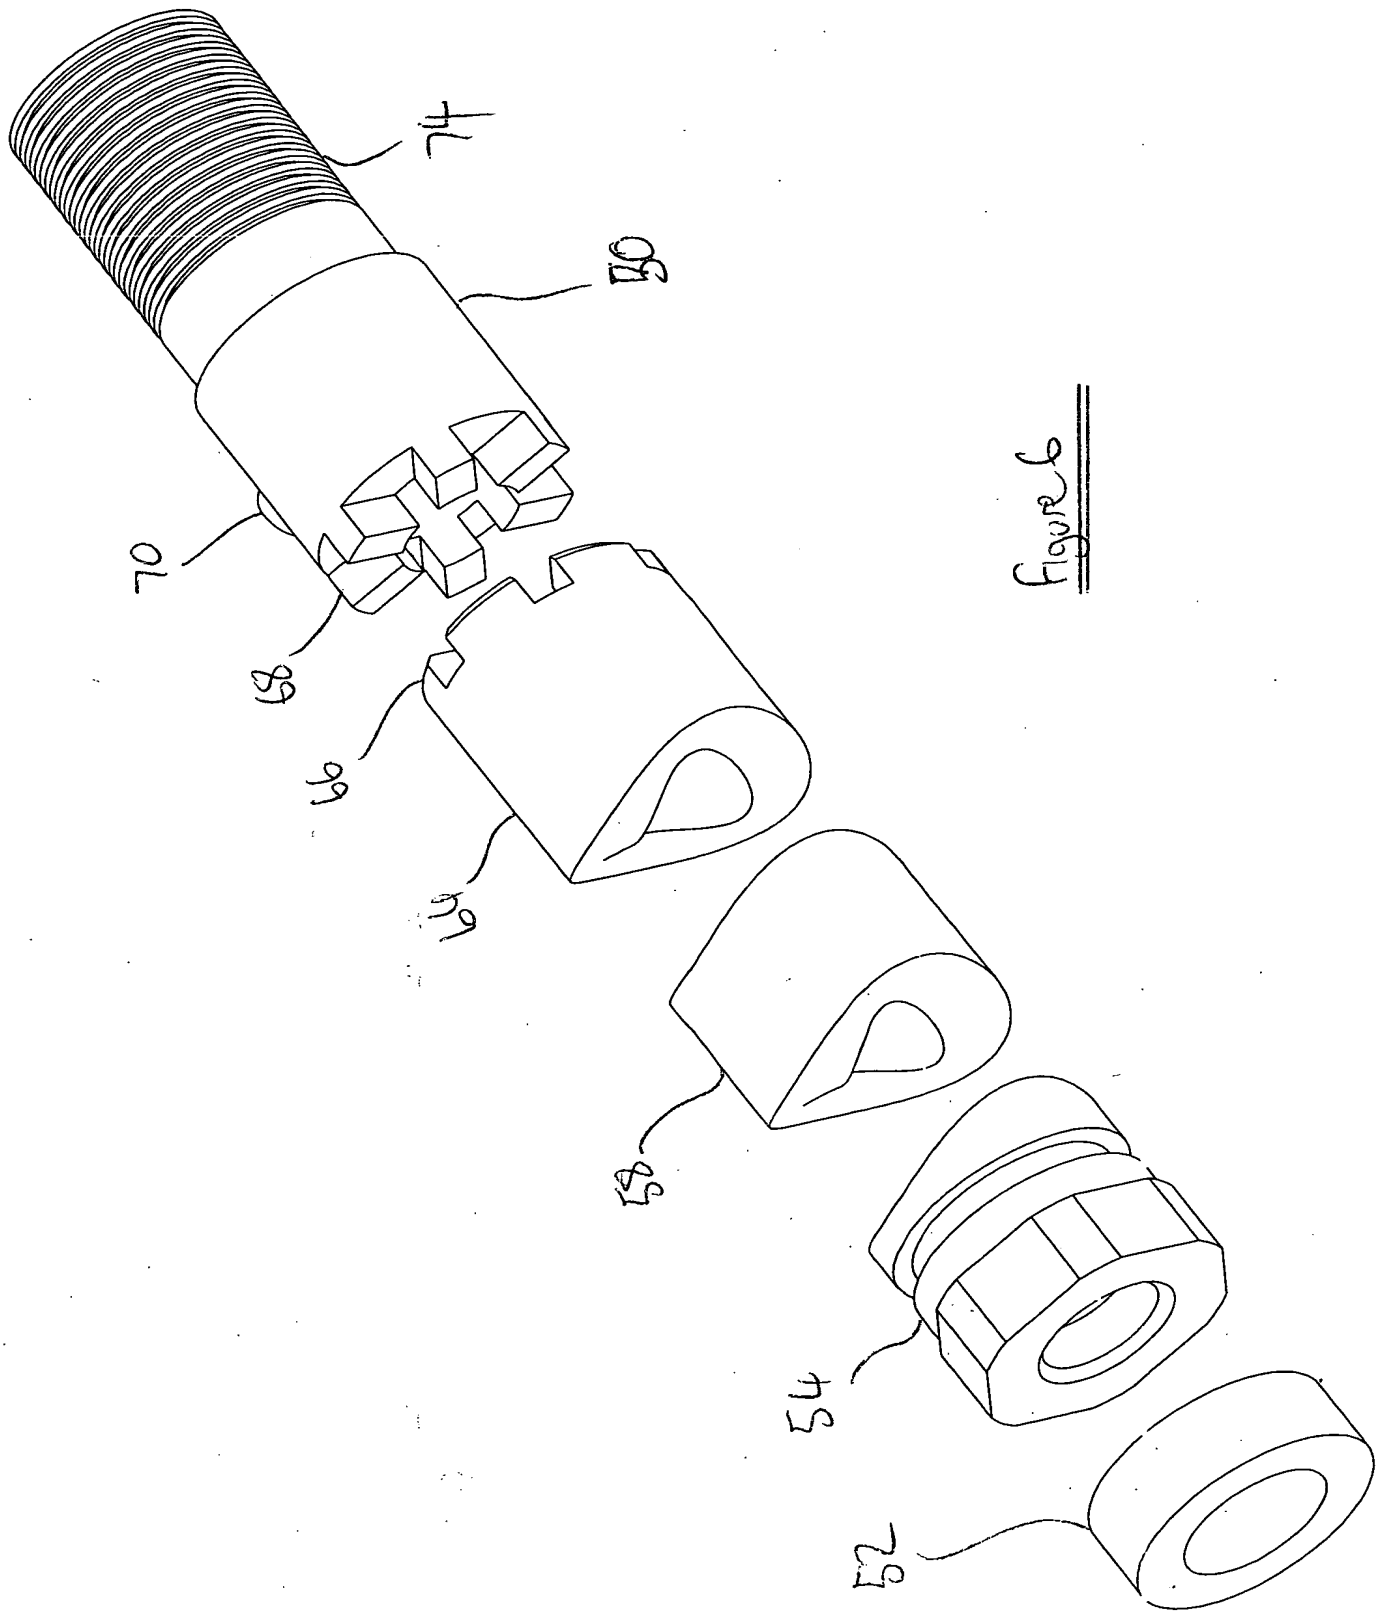


Figure 6



SKETCH No ALSP-S-2100  
ARTIFICIAL LIFT SYSTEM - FULL LAYOUT

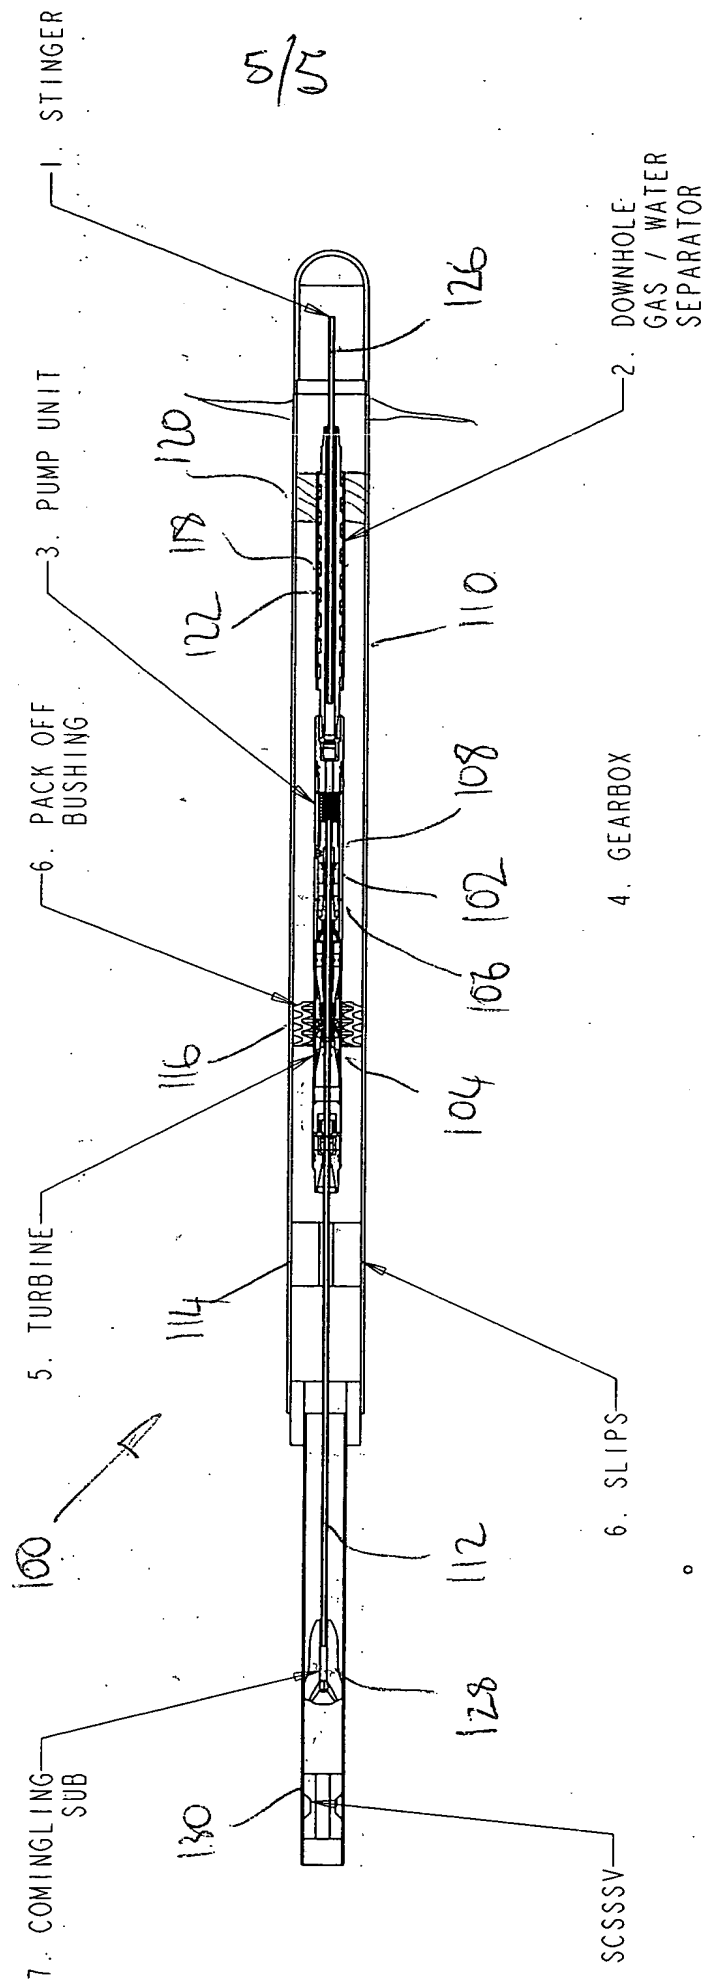


Figure 7

